

DUCHESNE COUNTY MONUMENT SURVEY RECORD



T4S R8W

1/4

SEC 15 | SEC 14

U.S.B.&M.


P-17



SCALE: 1"=30'



LINE	BEARING	DISTANCE
L1	N 47°23'49" E	21.83'
L2	N 31°24'20" W	20.66'
L3	S 45°11'06" W	34.81'
L4	S 01°53'28" E	31.42'

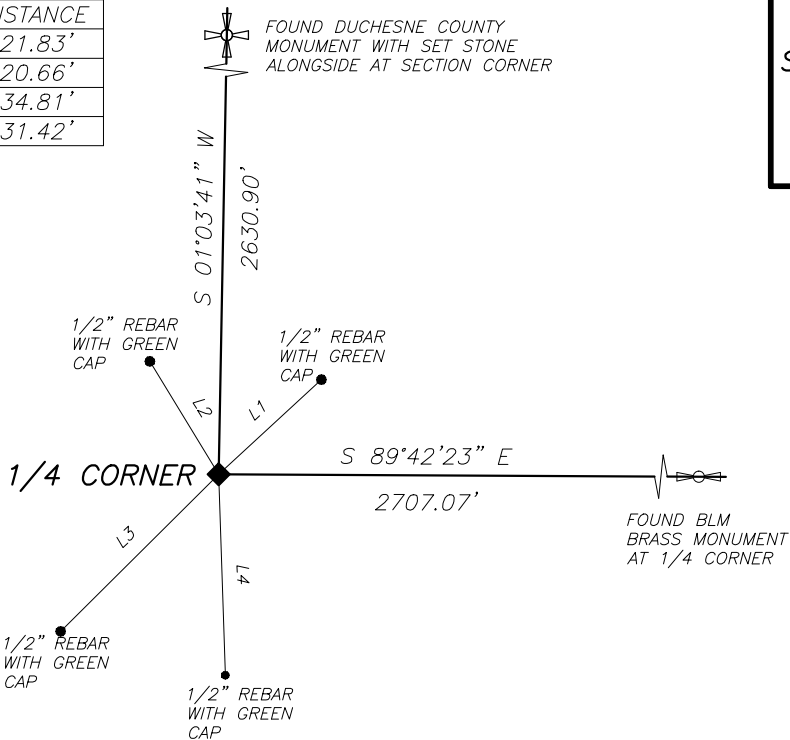

NOTE:  
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (SECTION CORNER) LOCATED AT LAT. 40°09'16.01931"N AND LONG. 110°45'51.61780"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND BLM ALUMINUM PIPE AND CAP MONUMENT AT 1/4 CORNER



PHOTO OF MARKINGS ON MONUMENT

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

PLACED FOUR 1/2" REBAR WITH GREEN PLASTIC CAPS MARKED "REFERENCE MARKER" AS REFERENCE POINTS AS SHOWN

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)  
NAD83 UTAH CENTRAL ZONE  
N: 7217932.385  
E: 1846077.131  
NAVD88 EL: 6731.13'

LATITUDE: 40°07'57.97911" N  
LONGITUDE: 110°45'51.93508" W  
ELLIPSOID HEIGHT: 6677.71'  
(GEOID 03 CONUS)  
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.  
UT300040S0080W0\_500440



PHOTO OF MONUMENT FACING SOUTHEAST

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 22 MAY '19

Jerry D. Allred, Professional Land Surveyor  
Certificate No. 148951  
Duchesne County Surveyor

